

Fiber Optic Adapters

Greatway Technology offers FC, LC, SC, ST and Hybrid Adapters for CATV, Telecommunications, LANs, Test Equipments, Metro and Data Processing applications.

Features

- Low insertion loss and back reflection loss
- High precision alignment
- Compact design
- Telcordia, ANSI, TIA/EIA, NTT and JIS compliance
- Compliant with RoHS

Specifications:

Insertion Loss: <0.20dB

Durability: <0.20 dB typical change, 1000 matings


Operating Temperature: -40 to + 85°C

FC Adapter



FC Adapter Ordering Options			
Housing Shape	Housing Composition	Sleeve Material	Application
Square	One-piece	Zirconia	FC/PC
Round (D-shape)	Two-piece	PB	FC/APC

LC Adapter

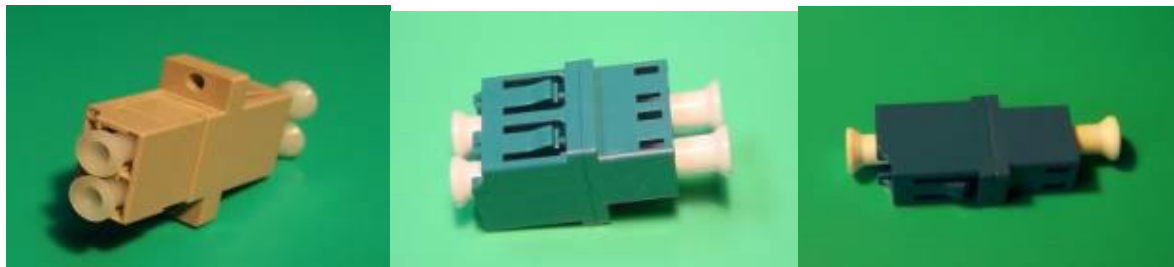

LC Adapter Ordering Options

With Zirconia Sleeve	With PB sleeve	Simplex
Duplex	Duplex with SC footprint	LC/APC

SC Adapter



SC Adapter Ordering Options

Housing Color	Housing Material	Sleeve Material	Channel	Application	Flange
Beige	Plastic	Zirconia	Simplex	SC/PC	With
Blue	Metal	PB	Duplex Quadplex	SC/APC	Without

ST Adapter



ST Adapter Ordering Options

Housing Material	Sleeve Material	Channel
Nickel plated brass	Zirconia	Duplex
Plastic	PB	Simplex

Hybrid Adapter



Hybrid Adapter Ordering Options		
SC to ST	SC to FC	FC to ST
LC to FC	LC to SC	DIN to FC