

### MPX Ribbon Patchcord


Parameters		
Operating Wavelength (nm)		1310,1550
Insertion Loss(Typical)(dB)		0.75
Return Loss(Min.)(dB)	SM APC	>55
	SM Plane	>30
	MM Plane	>25
Operating Temperature (°C)		-10~75
Storage Temperature (°C)		-40~85



Conformed Telcordia GR-326-CORE

### MPO Ribbon Patchcord

Parameters		
Operating Wavelength (nm)		1310,1550
Insertion Loss(Typical)(dB)		0.15
Return Loss(Min.)(dB)	SM APC	>55
	SM Plane	>30
	MM Plane	>25
Operating Temperature (°C)		-10~75
Storage Temperature (°C)		-40~85

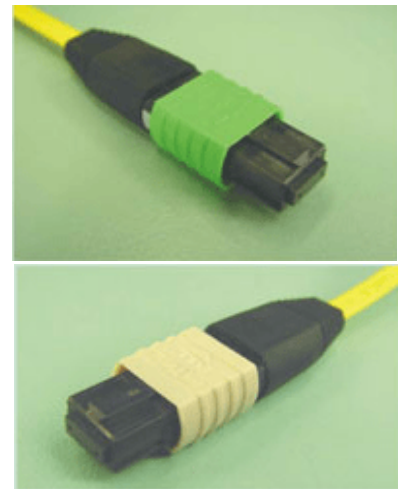

Conformed Telcordia GR-326-CORE